

IronWrap Exteriors

587 - 377 - 7663

Info@ironwrapexteriors.com

10743 180 St NW, Edmonton, AB T5S 1G6

Top View

94 Geikie Street, Jasper, AB, Canada



Copyright ©2024 Roofruler.com | All rights reserved.

Measurement

94 Geikie Street, Jasper, AB, Canada

33882 sqft | 18 facets | 3/12 Predominant Pitch




Copyright ©2024 Roofruler.com | All rights reserved.

Length

94 Geikie Street, Jasper, AB, Canada

- Eaves: 835ft 0in
- Valley: 275ft 6in
- Hips: 6ft 0in
- Ridges: 593ft 10in
- Rakes: 491ft 11in
- Parapet: 0ft 0in
- Transition: 0ft 0in
- Wall Flashing: 22ft 8in
- Step Flashing: 87ft 0in
- Unspecified: 0ft 0in

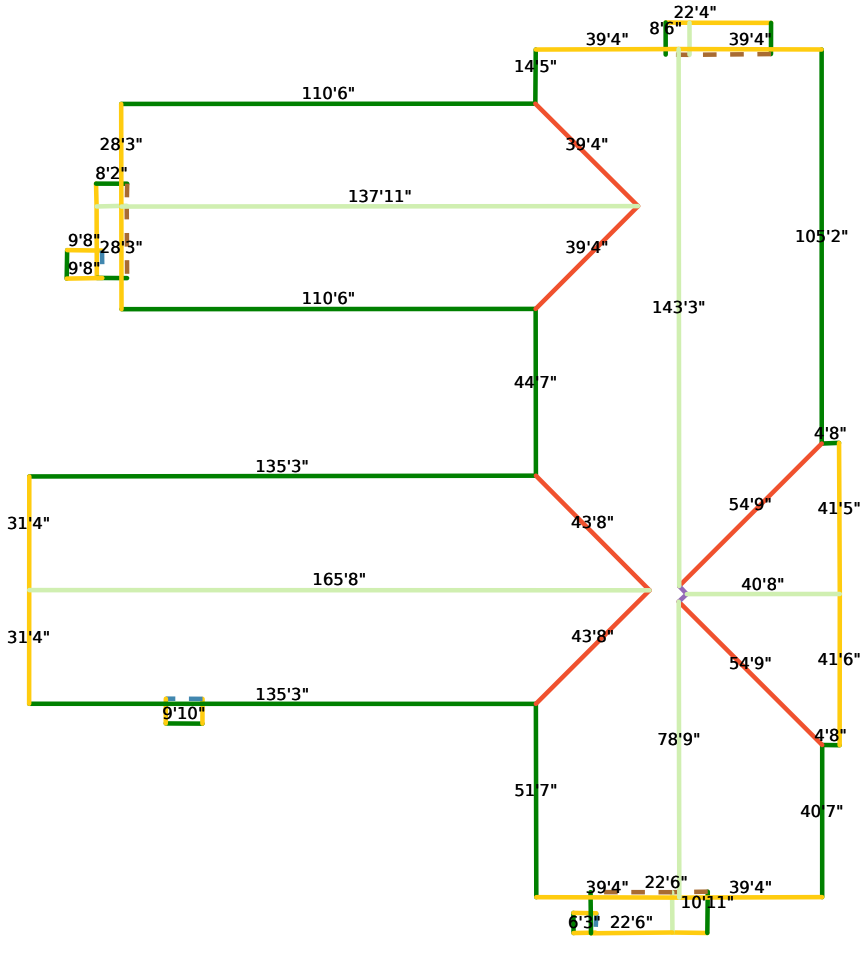

Note: -Some Diagram measurements have been hidden from the diagram to avoid overcrowding.- Eaves are defined as level roof edges. -Rakes are defined as sloped roof edges. - Wall Flashing pertains to level roof edges and excludes valleys. - Step flashing

Copyright ©2024 Roofruler.com | All rights reserved.

Area

94 Geikie Street, Jasper, AB, Canada


Total Roof Area: 33882 sqft

Pitched Roof Area: 33882 sqft

Flat Roof Area: 0 sqft

Predominant Pitch: 3/12

Predominant Pitch Area: 33882 sqft

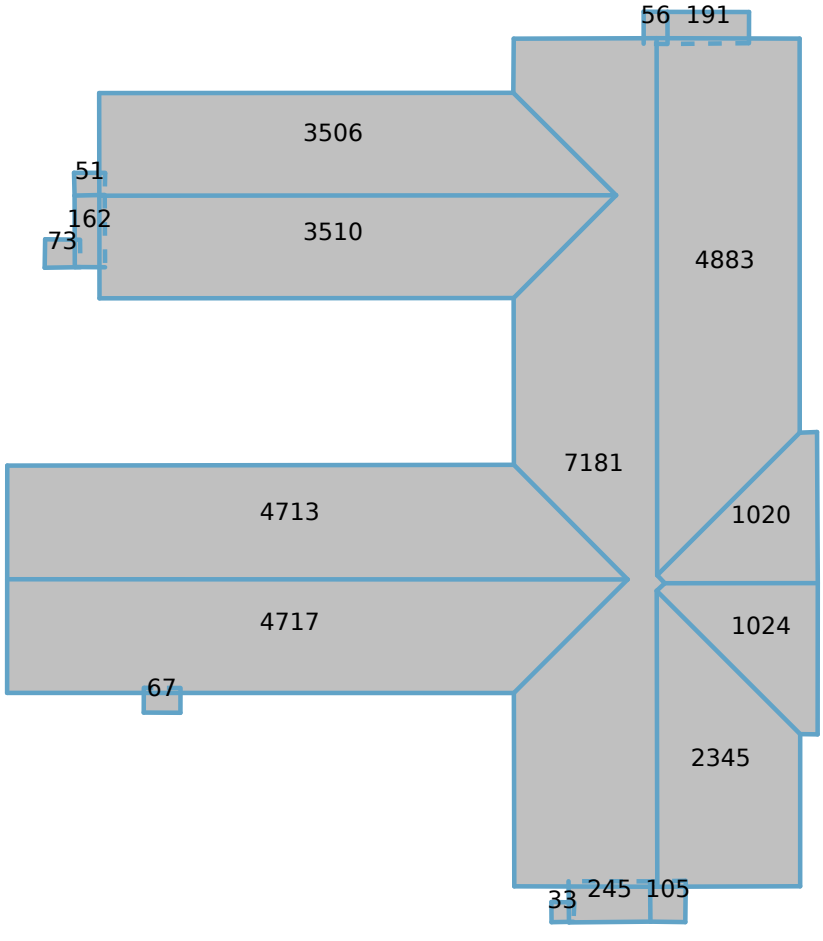


Note: -Some Diagram measurements have been hidden from the diagram to avoid overcrowding. - Diagram area measurements are rounded to the nearest whole number. - The total area is the sum of all the unrounded (exact) measurements, which is then

Copyright ©2024 Roofruler.com | All rights reserved.

Pitch & Direction

94 Geikie Street, Jasper, AB, Canada

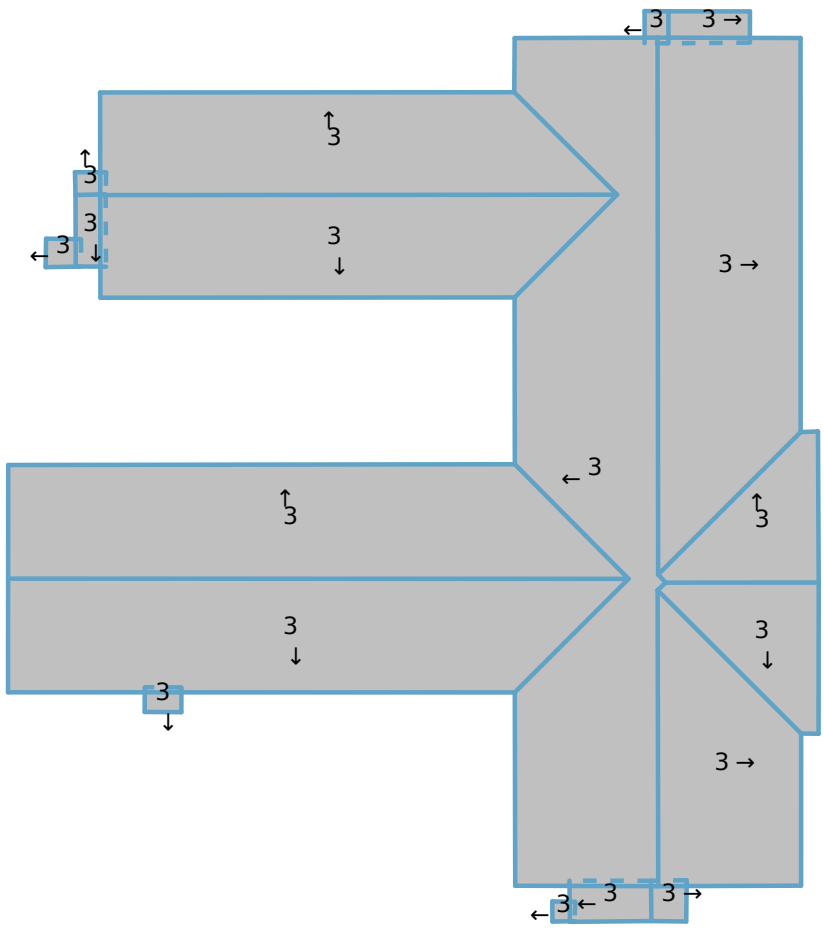


Note: -Some Diagram measurements have been hidden from the diagram to avoid overcrowding. - 6 and 9 are written •6 and •9 to avoid confusion. - Deleted facets do not have a pitch and therefore are not labeled. - Pitch values are shown in inches per foot, and arrows indicate slope direction.

Copyright ©2024 Roofruler.com | All rights reserved.

All Structures (Structure #1) Summary

94 Geikie Street, Jasper, AB, Canada

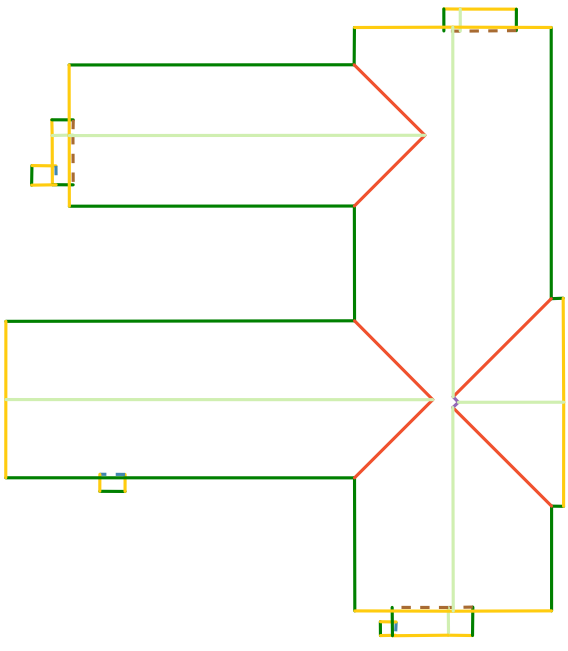

Measurements

Total Roof Area	33882 sqft
Total Pitched Area	33882 sqft
Total Flat Area	0 sqft
Total Roof Facets	18
Predominant Pitch	3/12
Total Eaves	835ft 0in
Total Valleys	275ft 6in
Total Hips	6ft 0in
Total Ridges	593ft 10in
Total Rakes	491ft 11in
Total Parapet	0ft 0in
Total Transition	0ft 0in
Total Wall Flashing	22ft 8in
Total Step Flashing	87ft 0in
Total Unspecified	0ft 0in
Hips + Ridges	599ft 10in
Eaves + Rakes	1326ft 11in

Pitch	3/12
Area (sqft)	33882
Squares	338.82

Waste %	0 %	3 %	5 %	7 %	10 %	15 %	20 %
Area (sqft)	33882	34898.46	35576.1	36253.74	37270.2	38964.3	40658.4
Squares	338.82	348.9846	355.761	362.5374	372.702	389.643	406.584

Note: - Eaves are defined as level roof edges. -Rakes are defined as sloped roof edges. -Wall flashing pertains to level roof edges and excludes valleys. - Step flashing pertains to sloped roof edges and excludes areas around penetrations. -Waste table excludes additional materials needed for ridges, hips, valleys, etc.

Copyright ©2024 Roofruler.com | All rights reserved.