

IronWrap Exteriors

587 - 377 - 7663

Info@ironwrapexteriors.com


10743 180 St NW, Edmonton, AB T5S 1G6

Report Prepared for
Brandon Beattie - Al and Lorrie

Project location
Alberta North

Top View

27031 TWP RD 572

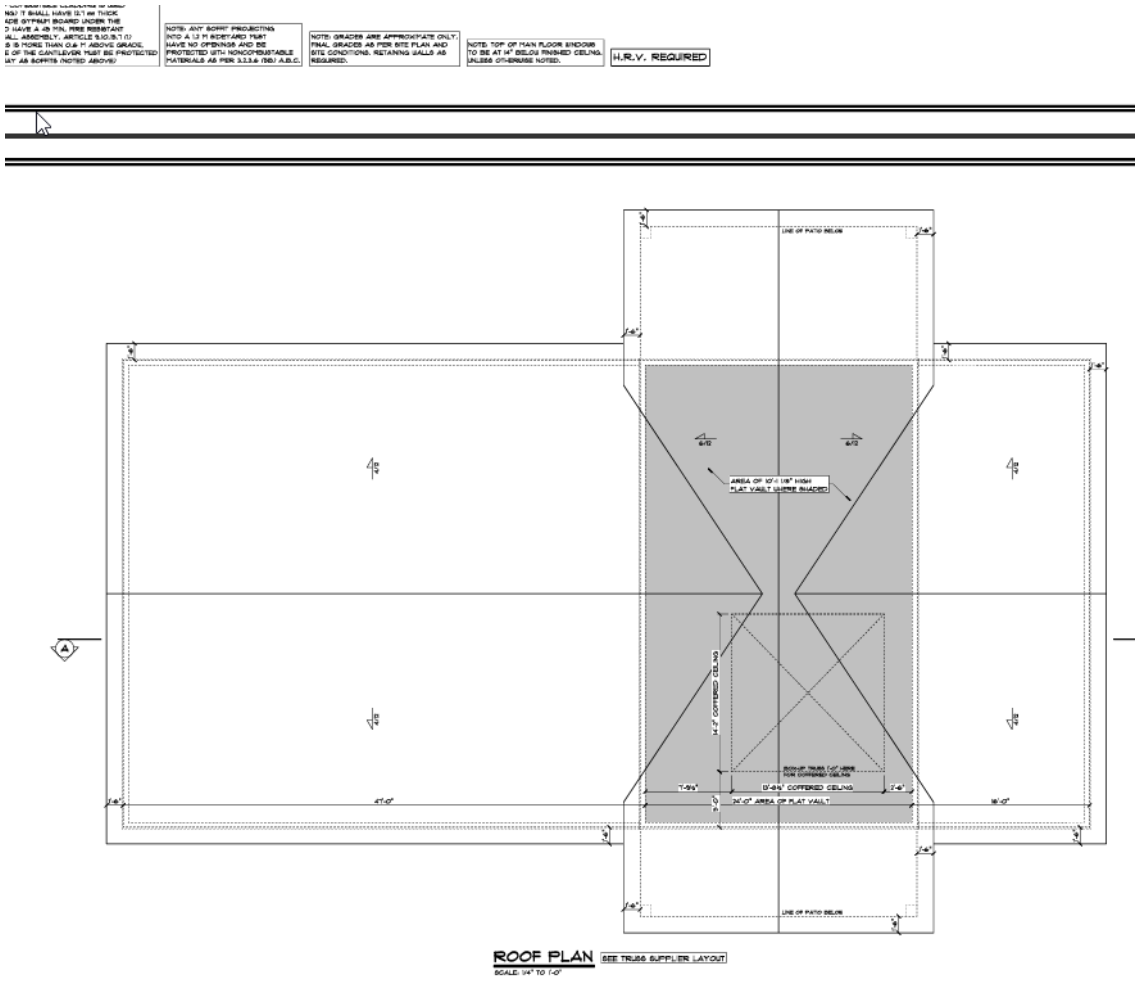


Copyright ©2024 Roofruler.com | All rights reserved.

Measurement

27031 TWP RD 572

4969 sqft 6 facets 4/12 Predominant Pitch

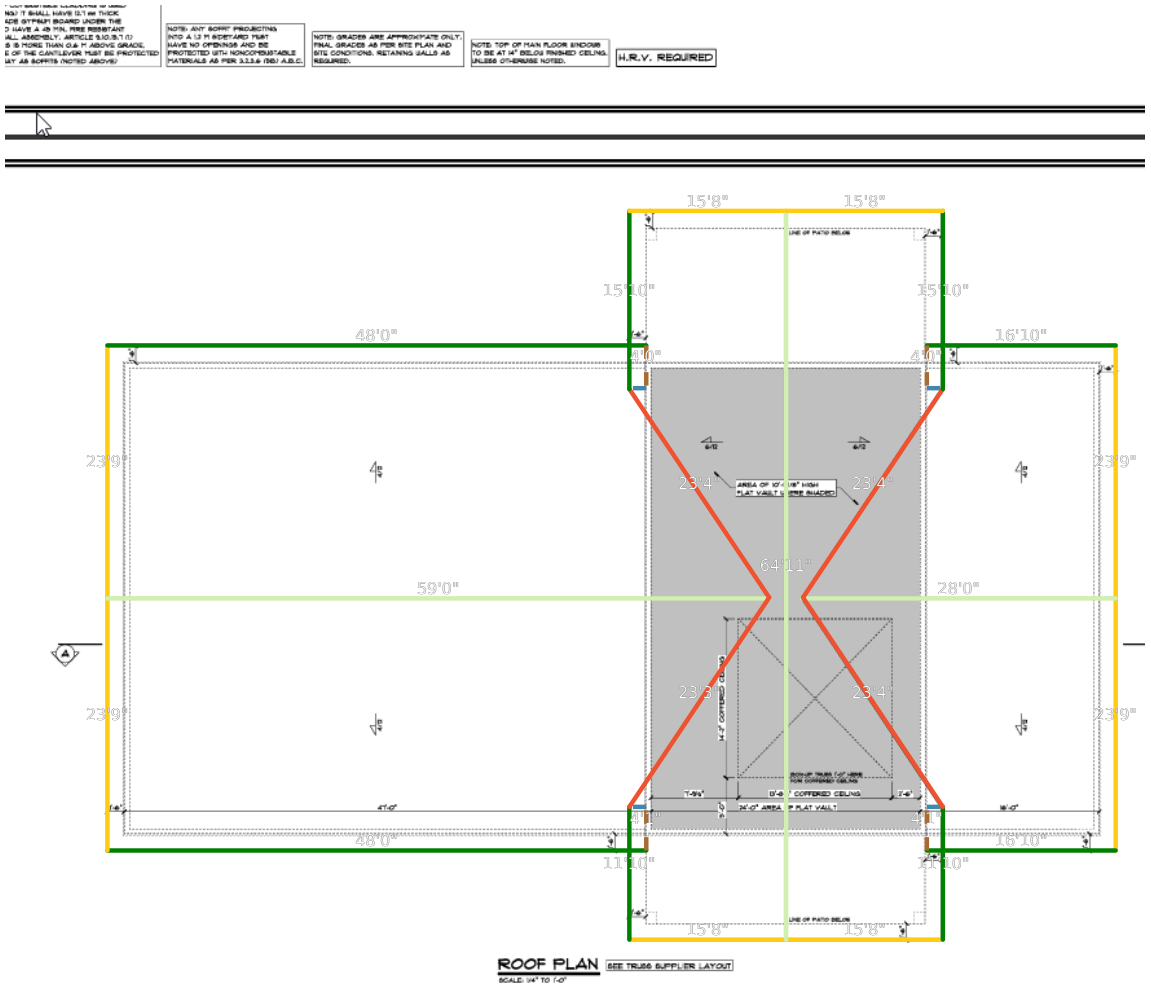



Copyright ©2024 Roofruler.com | All rights reserved.

Length

27031 TWP RD 572

- Eaves: 185ft 0in
- Valley: 93ft 3in
- Hips: 0ft 0in
- Ridges: 151ft 11in
- Rakes: 157ft 8in
- Parapet: 0ft 0in
- Transition: 0ft 0in
- Wall Flashing: 6ft 0in
- Step Flashing: 16ft 2in
- Unspecified: 90ft 0in

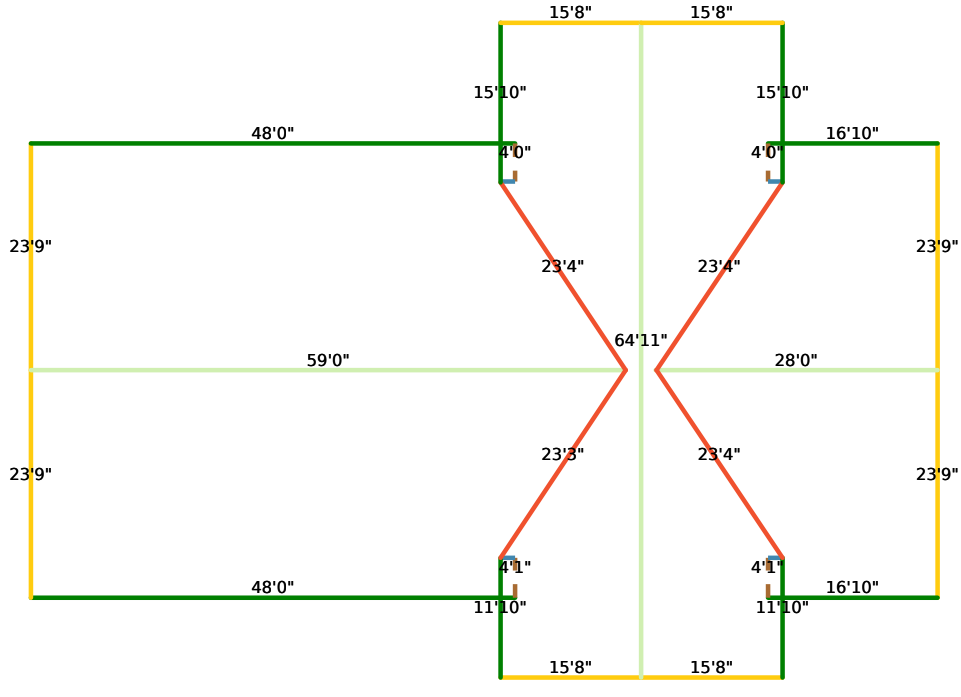



Note: -Some Diagram measurements have been hidden from the diagram to avoid overcrowding.- Eaves are defined as level roof edges. -Rakes are defined as sloped roof edges. - Wall Flashing pertains to level roof edges and excludes valleys. - Step flashing

Copyright ©2024 Roofruler.com | All rights reserved.

Area

27031 TWP RD 572


Total Roof Area: 4969 sqft

Pitched Roof Area: 4969 sqft

Flat Roof Area: 0 sqft

Predominant Pitch: 4/12

Predominant Pitch Area: 3457 sqft

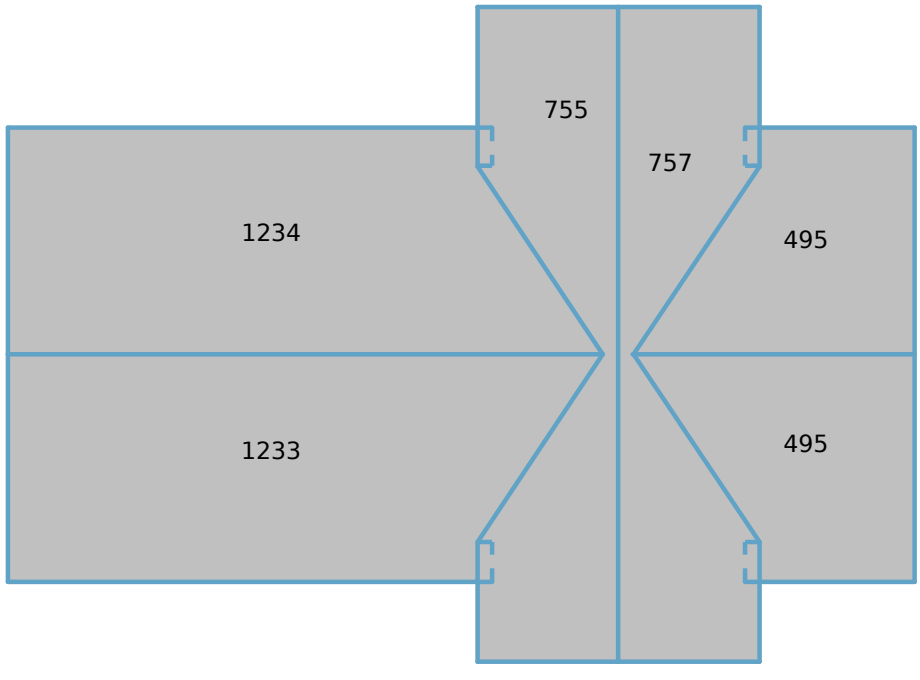



Note: -Some Diagram measurements have been hidden from the diagram to avoid overcrowding. - Diagram area measurements are rounded to the nearest whole number. - The total area is the sum of all the unrounded (exact) measurements, which is then

Copyright ©2024 Roofruler.com | All rights reserved.

Pitch & Direction

27031 TWP RD 572

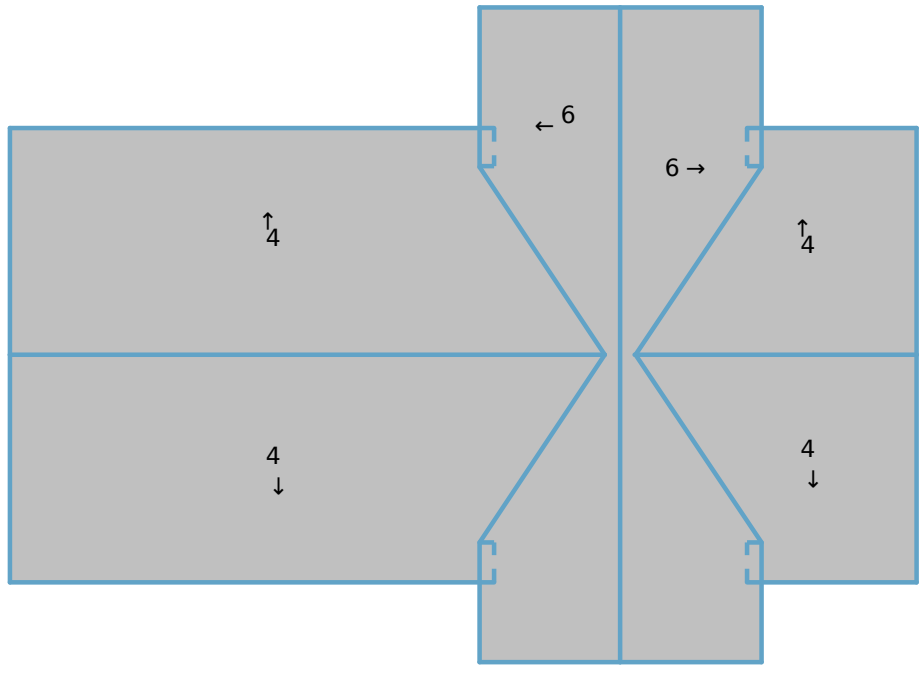




Note: -Some Diagram measurements have been hidden from the diagram to avoid overcrowding. - 6 and 9 are written •6 and •9 to avoid confusion. - Deleted facets do not have a pitch and therefore are not labeled. - Pitch values are shown in inches per foot, and arrows indicate slope direction.

Copyright ©2024 Roofruler.com | All rights reserved.

All Structures (Structure #1) Summary

27031 TWP RD 572

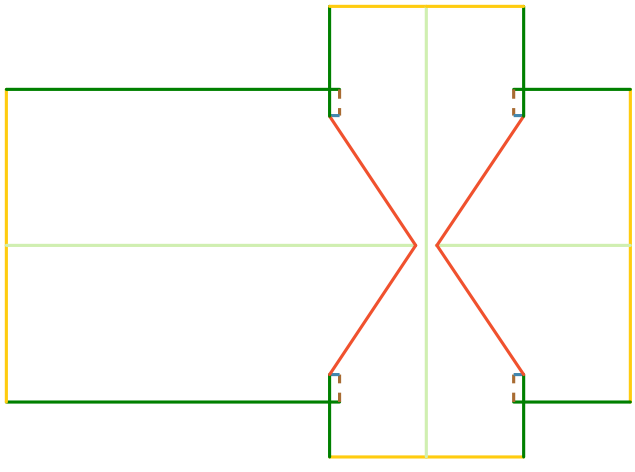

Measurements

Total Roof Area	4969 sqft
Total Pitched Area	4969 sqft
Total Flat Area	0 sqft
Total Roof Facets	6
Predominant Pitch	4/12
Total Eaves	185ft 0in
Total Valleys	93ft 3in
Total Hips	0ft 0in
Total Ridges	151ft 11in
Total Rakes	157ft 8in
Total Parapet	0ft 0in
Total Transition	0ft 0in
Total Wall Flashing	6ft 0in
Total Step Flashing	16ft 2in
Total Unspecified	90ft 0in
Hips + Ridges	151ft 11in
Eaves + Rakes	342ft 8in

Pitch	4/12	6/12
Area (sqft)	3457	1512
Squares	34.57	15.12

Waste %	0 %	3 %	5 %	7 %	10 %	15 %	20 %
Area (sqft)	4969	5118.07	5217.45	5316.83	5465.9	5714.35	5962.8
Squares	49.69	51.1807	52.1745	53.1683	54.659	57.1435	59.628

Note: - Eaves are defined as level roof edges. -Rakes are defined as sloped roof edges. -Wall flashing pertains to level roof edges and excludes valleys. - Step flashing pertains to sloped roof edges and excludes areas around penetrations. -Waste table excludes additional materials needed for ridges, hips, valleys, etc.

Copyright ©2024 Roofruler.com | All rights reserved.